

ARDEX FS-DD

FLEXIBLE TILE GROUT FOR NARROW JOINTS



Non-sanded cement-based, wall and floor grouting compound which is specially designed for polished porcelain to avoid scratching the surface of the tile. Available in a range of colours. ARDEX FS-DD is easy to apply and fast drying, with final cleaning able to be completed 24 hours after initial wash-off with no residue left.

- Contains hydrophobing agent
- Dirt resistant and water resistant
- For joints 1mm to 4mm without shrinkage
- Walkable after 5 hours
- Improved colour consistency
- Exceptionally easy clean off
- Reduced chance of efflorescence
- Low VOC

Location



- Internal or external
- Walls or floors
- Suitable for continuous immersion

Drying Time

- Pot life: 2.5 hours
- Initial set: 5 hours
- Full cure: 7 days

Tile Types

- Ceramic
- Porcelain
- Terrazzo
- Slate
- Quarry tiles
- Moisture insensitive natural stone
- Glass

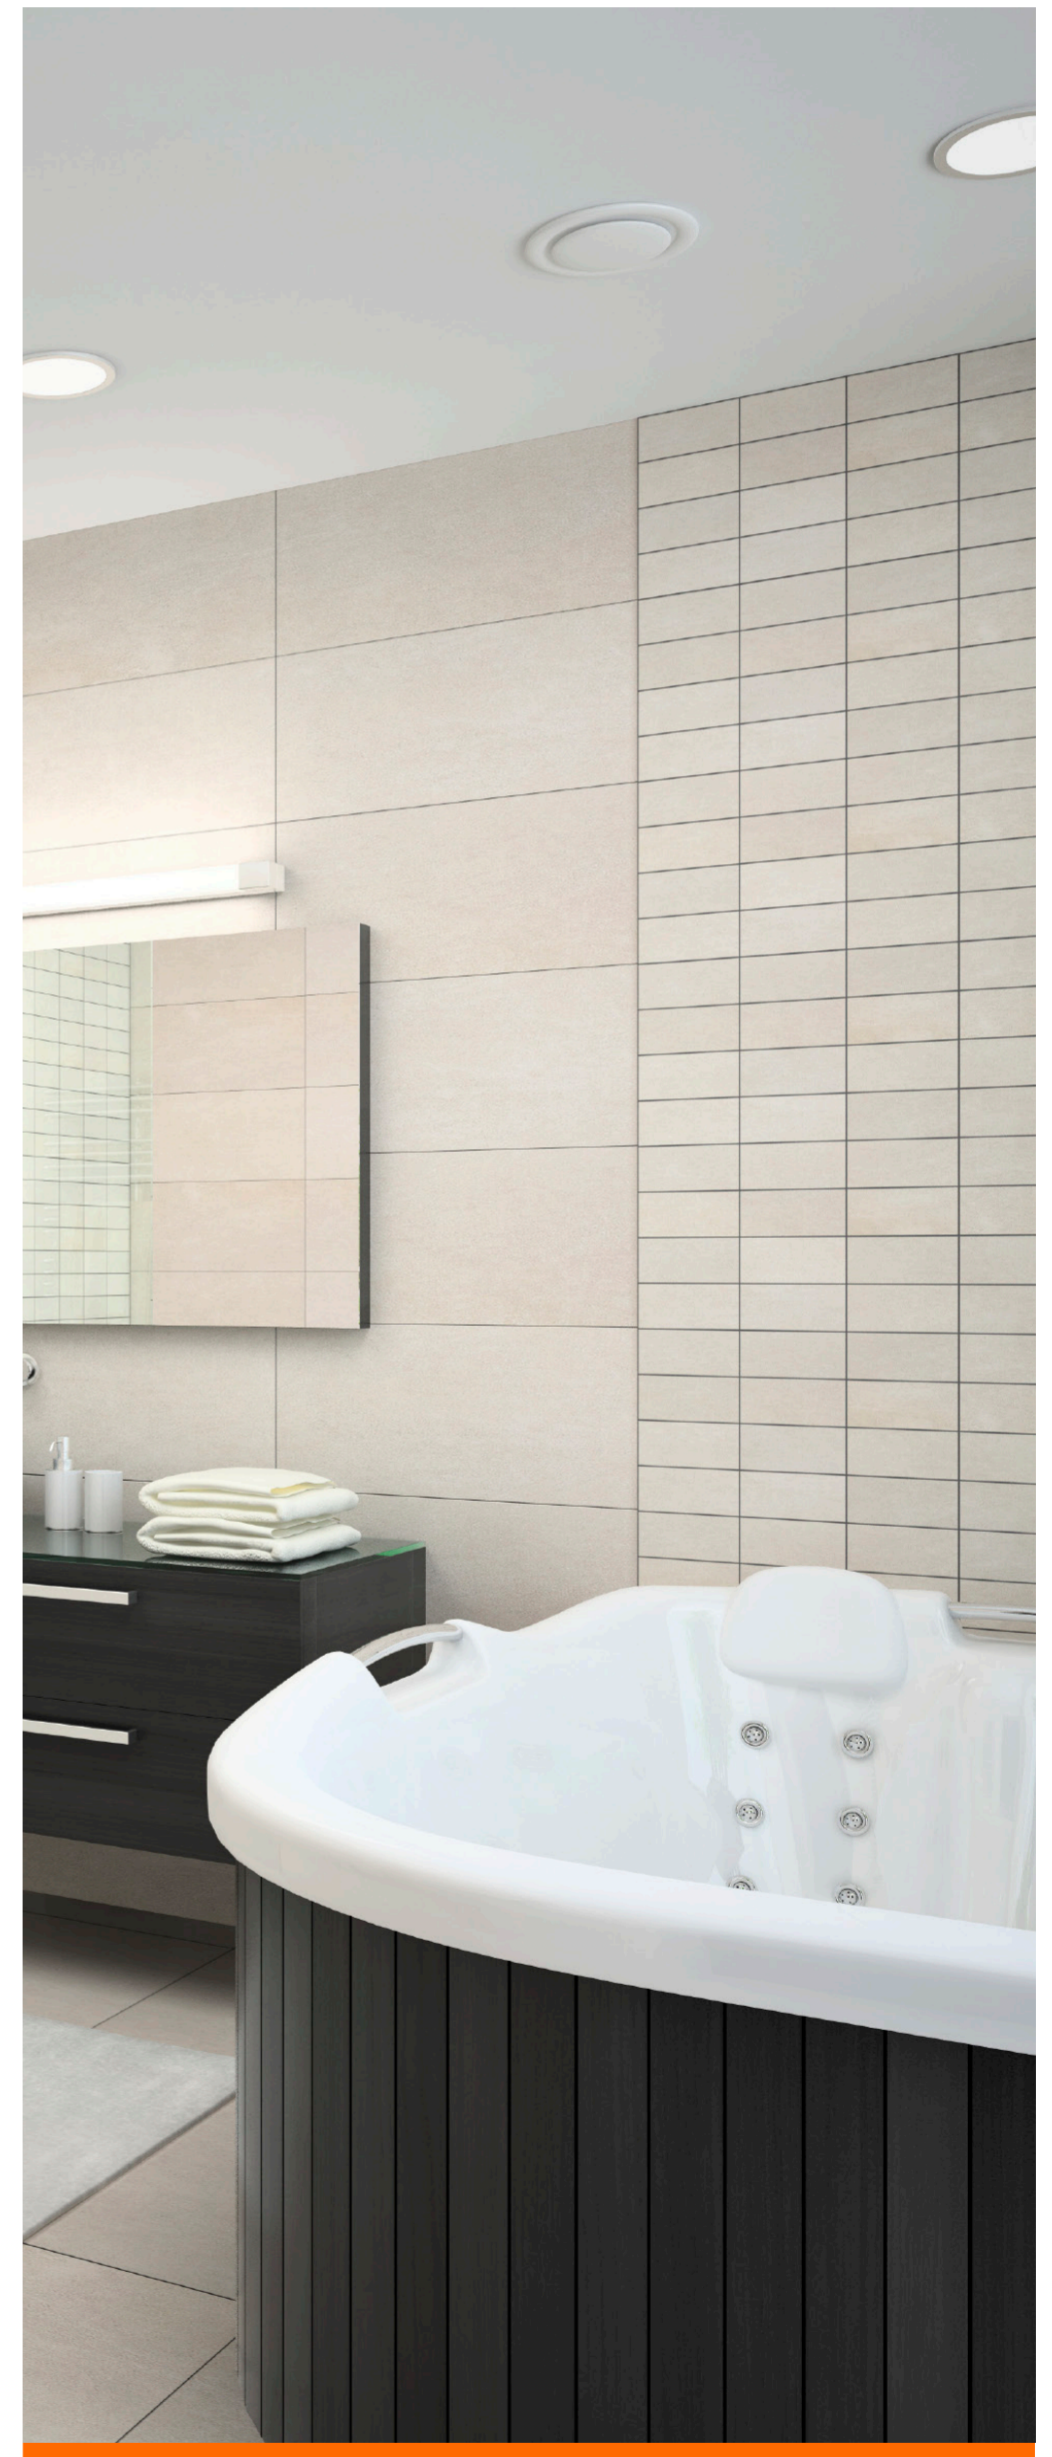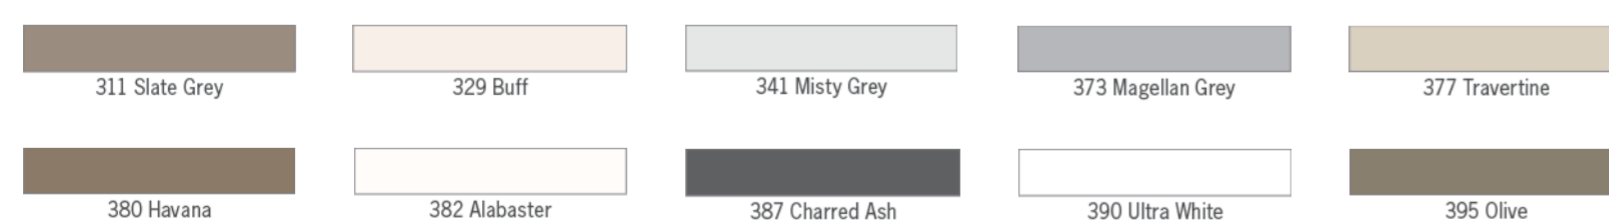

To find out more
call 0800 227 339 or
visit www.ardex.co.nz

Download the ARDEX app



search for:
'ARDEX New Zealand'



SYSTEMARDEX
PREMIUM PERFORMANCE