


ARDEX X 17

FLEXIBLE, NON-SLUMP WALL AND FLOOR TILE ADHESIVE

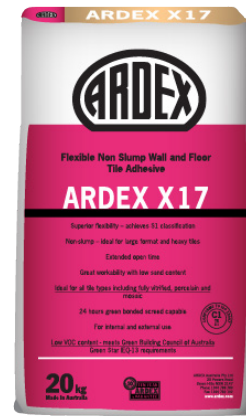

ARDEX X 17 is a polymer fortified cement-based wall and floor tile adhesive that has been specially formulated with mastic-type properties. ARDEX X 17 suitable for internal and external use in residential and light commercial applications.

- Flexible – achieves S1 classification
- Non slump – ideal for large format and heavy tiles
- Extended open time
- Great workability with low sand content
- Ideal for all tile types including fully vitrified, porcelain and mosaics
- 24 hours green bonded screed capable
- For internal and external use
- Low VOC content - meets Green Building Council of Australia Green Star IEQ-13 requirements

Location

- Internal or external
- Wall or floor
- Residential or commercial
- Suitable over underfloor heating

Tile Types

- Fully vitrified and ceramic tiles
- Porcelain
- Natural stones (excluding moisture sensitive)
- Mosaics

Substrates

- Concrete, renders, screeds
- Fibre-cement sheet, plasterboard on walls
- Compressed fibre-cement sheet on floors
- ARDEX liquid applied undertile waterproofing membranes
- Existing ceramic tiles (internal dry areas)
- Ceramic Tile Underlay (CTU)

Technical Details


- Colour: White
- Open time: 30 minutes
- Adjustment time: 20 minutes
- Grouting time: 24 hours
- Pot life: 3 hours

Coverage

- Walls: 8m² per 20kg
- Floors: 6m² per 20kg

Packaging

Packaging	Code
White	25276
Grey	19990

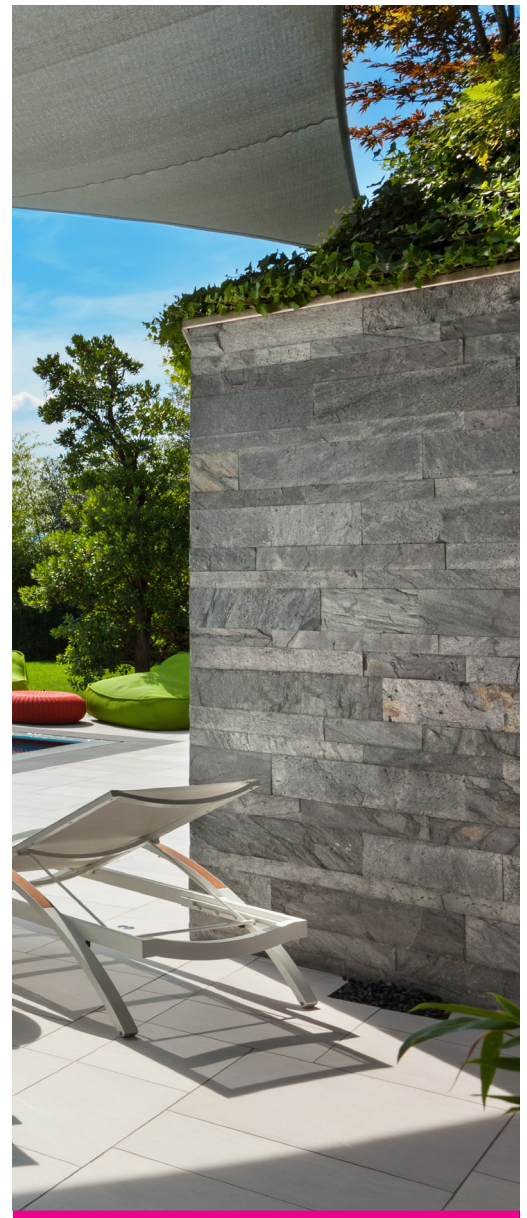

To find out more call 0800 227 339 or visit www.ardex.co.nz

Download the ARDEX app



search for: 'ARDEX New Zealand'



SYSTEMARDEX
PREMIUM PERFORMANCE