


ARDEX X 56

HIGHLY FLEXIBLE TILE ADHESIVE

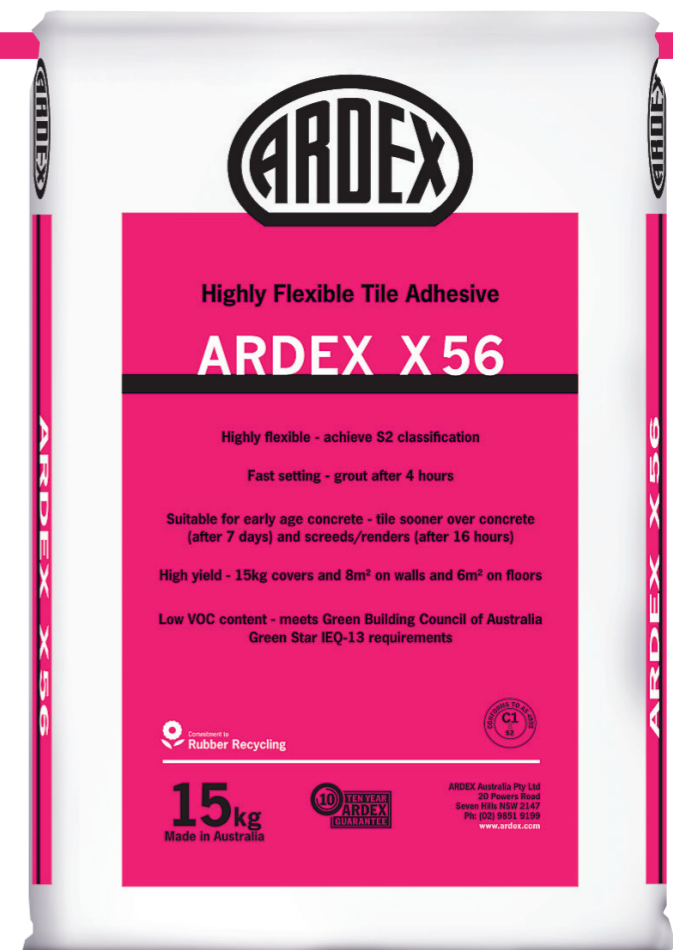

ARDEX X56 is a fast setting, polymer modified highly flexible adhesive. This flexibility makes the adhesive suitable for tiling directly to sheet timber and concrete substrates subject to thermal/shrinkage movement without the addition of additives. ARDEX X56 is ideal for quick turnaround applications owing to its fast drying formulation and compatibility with early age concrete and renders/screeds.

- Highly flexible - achieves S2 classification
- Fast drying - grout after 4 hours
- Suitable for early age concrete - tile over concrete after 7 days
- High yield
- Low VOC content

Location

- Internal or external
- Walls or floors
- Commercial or residential
- Not suitable for continuous immersion

Tile Types

- Fully vitrified and ceramic tiles
- Porcelain
- Mosaics
- Natural stone (excluding moisture sensitive)

Substrates

- Internal, engineered sheet timber (particleboard, plywood)
- Cement render/screeds, concrete, aerated concrete
- Fibre-cement sheet, plasterboard, compressed fibre-cement sheet
- Existing ceramic tiles (where glaze is removed)
- ARDEX undertile liquid applied waterproofing membranes

Coverage

- Walls: 8m² per 15kg bag
- Floors: 6m² per 15kg bag

Packaging

15kg bag

Code

10227



To find out more
call 0800 227 339 or
visit www.ardex.co.nz

Download the ARDEX app



search for:
'ARDEX New Zealand'



SYSTEMARDEX
PREMIUM PERFORMANCE