

SELF-LEVELLING UNDERLAYMENT

ARDEX K 10 REACTIV8™

Self-Levelling Underlayment

ARDEX K 10 Reactiv8™ is a premium self-levelling and smoothing compound that is used to level and smooth interior concrete, correctly prepared terrazzo, ceramic or quarry tiles or prepared epoxy coating systems, on concrete prior to the installation of finished flooring – on, above or below grade.

LOCATION

- Internal

SUBSTRATES

- Burnished concrete, terrazzo, ceramic and quarry tile and epoxy coating systems

FLOOR COVERINGS

- Most floor coverings including non-moisture sensitive tile and stone

COVERAGE


- 1.7kg powder/mm/m² or 4m² at 3mm thick

THICKNESS

- 1.7kg powder/mm/m² or 4m² at 3mm thick
- Minimum thickness of 1.5mm and up to 15mm thick
- To match existing elevations, ARDEX K 10 Reactiv8™ can be tapered to as thin an application as the sand in the material will allow.
- If a true featheredge is needed, ARDEX recommends using ARDEX FEATHER FINISH for transitions

DRYING TIMES

- ARDEX K 10 Reactiv8™ is walkable 2 to 3 hours after installation.
- Drying time is a function of jobsite temperature and humidity conditions, as well as the installation thickness. Low substrate temperatures and/or high ambient humidity will extend the drying time, whilst higher temperatures and low humidity will shorten the drying time. Adequate ventilation and heat will aid drying.

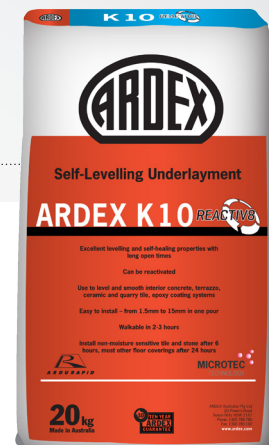

ARDEX K 10 REACTIV8™ QUICK FACTS

- Excellent levelling and self-healing properties with long open times
- Can be reactivated
- Use to level and smooth interior concrete, terrazzo, ceramic and quarry tiles and epoxy coating systems
- Easy to install – from 1.5mm to 15mm in one pour
- Walkable in 2-3 hours
- Install non-moisture sensitive tile and stone after 6 hours, most other floor coverings after 24 hours



CONTACT US

1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEMARDEX
PREMIUM PERFORMANCE