

# SELF-LEVELLING AND SELF-SMOOTHING CEMENT

## ARDEX K15 MICROTEC®

### Self-Levelling and Self-Smoothing Cement

ARDEX K 15 Micro is extremely versatile and is suitable for a wide range of substrates. It contains Ardurapid technology with Microfibre reinforcement which allows for high flow properties.



LOW VOC



#### LOCATION

- Internal in above or below grade applications

#### SUBSTRATES

- New, existing or rough screeded concrete, rain damaged concrete which has been mechanically prepared, existing quarry and ceramic tile, steel decking (contact ARDEX Technical Services), timber floors (contact ARDEX Technical Services) and damp or moisture vulnerable concrete when used in conjunction with an ARDEX moisture control system.

#### FLOOR COVERINGS

- Linoleum, vinyl, carpet
- Ceramic and quarry tiles
- Timber – parquetry with the addition of ARDEX E 25 if used over ARDEX P 82 and floating

#### COVERAGE


- 4m<sup>2</sup> at 3mm

#### THICKNESS

- Feather edge to any depth
- Can be bulk filled using 2–5mm aggregate

#### DRYING TIME

- Walkable in 2 hours
- Ready for vinyl in 16 hours

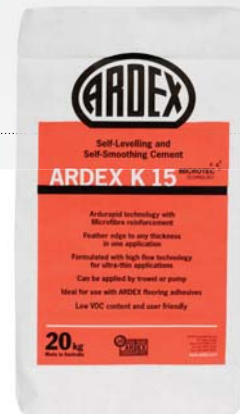

#### ARDEX K15 MICROTEC® QUICK FACTS

- Ardurapid technology with Microfibre reinforcement
- Feather edge to any thickness in one application
- Formulated with high flow technology for ultra-thin applications
- Can be applied by trowel or pump
- Ideal for use with ARDEX floor adhesives
- Low VOC content and user friendly



CONTACT US  
1300 788 780 | [www.ardexaustralia.com](http://www.ardexaustralia.com)



Download the Ardex app  
(search for 'ARDEX Australia')



SYSTEMARDEX  
PREMIUM PERFORMANCE