


EXTERNAL SELF LEVELLING TOPPING

ARDEX K 301

Exterior Levelling and Smoothing Compound

ARDEX K 301 Levelling Compound is formulated for external applications resisting the effects of sun, rain, heat, cold and even freeze thaw conditions. Having outstanding durability, ARDEX K 301 is also perfect for wear surfaces in workshops, domestic garages, storage areas, light commercial areas, courtyards and footpaths.

LOW VOC 

LOCATION

- External & internal
- Above or below grade applications

SUBSTRATES

- New and existing concrete, moist or dry

COATINGS

- Polyurethane coatings
- Epoxy coatings
- Ceramic and quarry tiles

COVERAGE


- 6m² at 2mm

THICKNESS

- 2-20mm

DRYING TIME

- Walkable from 2-3 hours
- Ready for tile, carpet and floating floors from 24 hours
- Coatings and vinyl after 48 hours

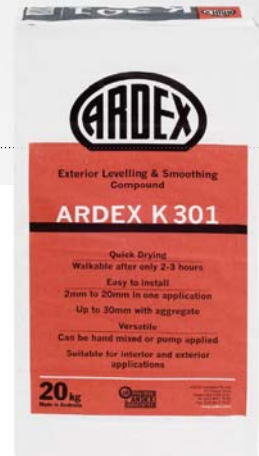

ARDEX K 301 QUICK FACTS

- Quick drying - walkable after only 2 to 3 hours
- Easy to install - 2mm to 20mm in one application
- Versatile - can be hand mixed or pump applied
- Suitable for interior and exterior applications



CONTACT US
1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEMARDEX
PREMIUM PERFORMANCE