

# CRACK INJECTION

## ARDEX RA 144

### Low Viscosity Structural Concrete Crack Injection Epoxy

ARDEX RA 144 is a low viscosity, high modulus structural epoxy adhesive used for a variety of repair projects. With its low viscosity, it is perfect for horizontal gravity-feed repair of fine to medium size cracks and can be used in temperatures between 10°C and 35°C. Its bonding and sealing capabilities for interior and exterior slabs are exceptional. It can also be used as an epoxy mortar for spall repair when mixed with aggregate.

#### LOCATION

Interior/External

#### SUBSTRATES

Almost any material

#### COVERAGE

Coverage varies

#### COLOURS

Amber tint

#### DRYING AND CURING

Fully cured in 24 hours

#### VOC CONTENT

Low


#### PACKAGING

470mL dual cartridge



#### ARDEX RA 144 QUICK FACTS

- 100% solids, solvent free system with low VOC content
- Pressure injection and gravity feed structural crack repair in horizontal concrete, masonry for cracks from 3mm to 6mm

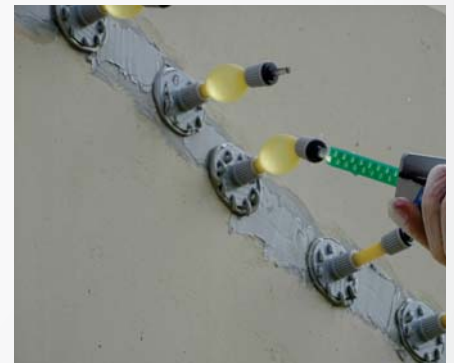

#### CONTACT US

1300 788 780 | [www.ardexaustralia.com](http://www.ardexaustralia.com)



Download the Ardex app  
(search for 'ARDEX Australia')



**SYSTEMARDEX**  
PREMIUM PERFORMANCE