

RENDERS AND SCREEDS

ARDEX WR 60

Polymer Modified Render Ideal for Non-porous and Flexible Substrates

ARDEX WR 60 is a fine-medium grade render and is suitable for rendering walls, both internally and externally, at an application thickness from 2-5 mm.

LOCATION

Internal/External

SUBSTRATES

Masonry (brickwork & blockwork), concrete walls, aac – autoclaved aerated concrete blocks and panels, EPS foam panels, existing render, blueboard, painted surfaces*.

THICKNESS

2-5mm

BENEFITS

No maturing time required; can be applied immediately after mixing.

COVERAGE

Coverage will vary depending on the condition of the surface and site conditions. As a guide, 20kg of ARDEX WR 60 mixes to 13 litres of mortar. As a guide, 20kg will cover:

- 5m² at 3mm thickness
- 3m² at 5mm thickness

COLOURS


Grey powder

DRYING TIMES

Touch-dry in 1–2 hours, subsequent coats after 4–8 hours.

PACKAGING

20kg bag

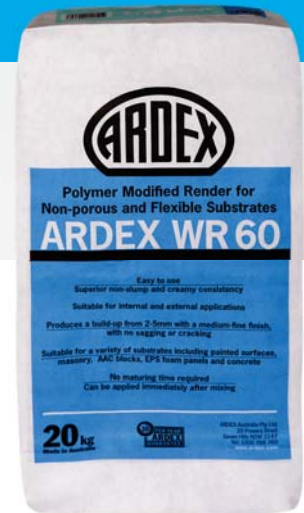

ARDEX WR 60 QUICK FACTS

- Easy to use with superior non-slump and creamy consistency
- Produces a build-up from 2-5mm with a medium-fine finish with no sagging or cracking
- No maturing time required



CONTACT US
1300 788 780 | www.ardexaustralia.com

